

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 03/086763 A1

(51) International Patent Classification⁷: B41J 2/015

(21) International Application Number: PCT/AU02/00765

(22) International Filing Date: 13 June 2002 (13.06.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/120,348 12 April 2002 (12.04.2002) US

(71) Applicant (for all designated States except US): SILVERBROOK RESEARCH PTY. LTD. [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): SILVERBROOK, KIA [AU/AU]; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, New South Wales 2041 (AU).


(74) Agent: SILVERBROOK, KIA; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, New South Wales 2041 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A PRINT ASSEMBLY FOR A WIDE FORMAT PAGEWIDTH PRINTER

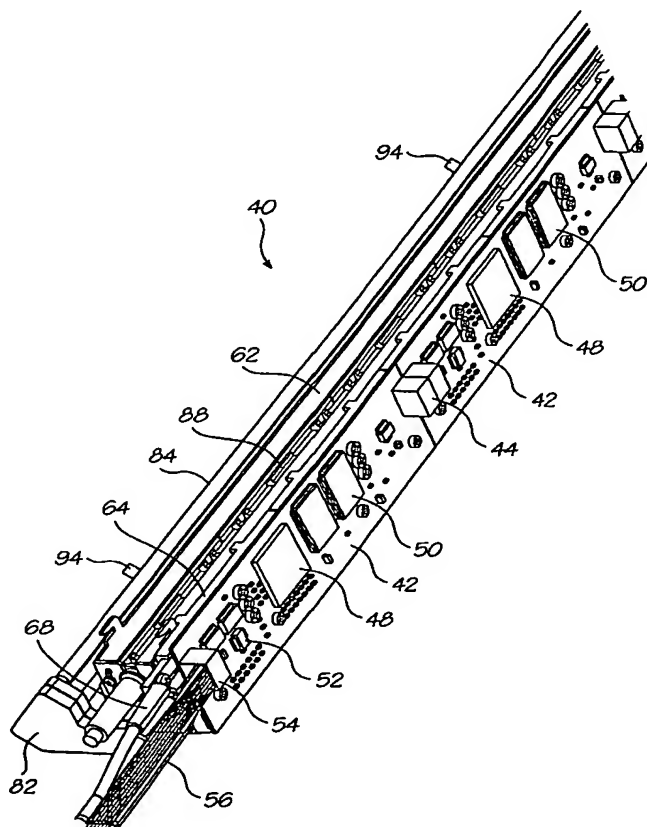

(57) Abstract: A print assembly (14) for a wide format printer (10) includes a carrier (187) that is mountable on a support structure (12) of the wide format printer (10) in an operative position with respect to a platen (106) of the wide format printer (10). A number of printhead chips (186) are positioned on the carrier (187), the printhead chips (186) together incorporating at least fifty thousand nozzle arrangements (210). The printhead chips (186) are positioned so that the printhead chips (186) are capable of ejecting ink drops into a printing zone (120) defined by the platen (106). Control circuitry (190) is also positioned on the carrier (187) and is configured to control operation of the printhead chips (186).